




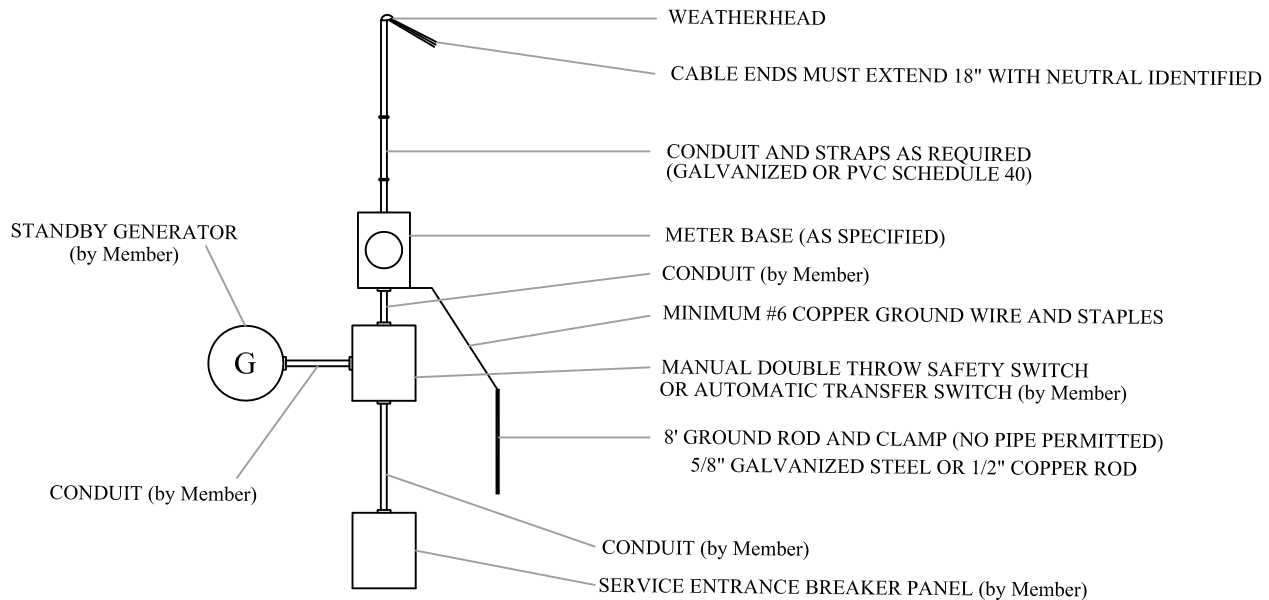
# Berkeley Electric Cooperative, Inc.

Your Touchstone Energy® Cooperative 

## Specification: Residential standby generator installation

Moncks Corner 843-761-8200 \* Johns Island 843-559-2458 \* Goose Creek 843-553-5020 \* Awendaw 843-884-7525

**TO THE MEMBER:** Service will not be extended to houses, mobile homes, and other permanent type facilities parked or built under or over Berkeley Electric Cooperative, Inc. ("the Cooperative") power lines. Service conductor shall have a clearance of no less than three feet (3') from windows that are designed to be opened, doors, porches, fire escapes or similar locations.



### NOTES:

1. Above 100 Amps, meter bases with aluminum conductors require compression connectors. For copper conductors, screw down lugs are acceptable.
2. All meter, standby generator, and double throw switch locations are to be determined by the Service Planning Department (in District Office).
3. All wiring to be in strict accordance with requirements of the latest version of the National Electric Code and National Electric Safety Code, the Cooperative, and any local inspection authorities having jurisdiction.

RECOMMENDED WIRE SIZE Conductor Types and Sizes		
Amps	Copper	Aluminum
100	#4	#2
150	#1	#2/0
200	#2/0	#4/0

Based on NEC Table 310.15(B)(16)